


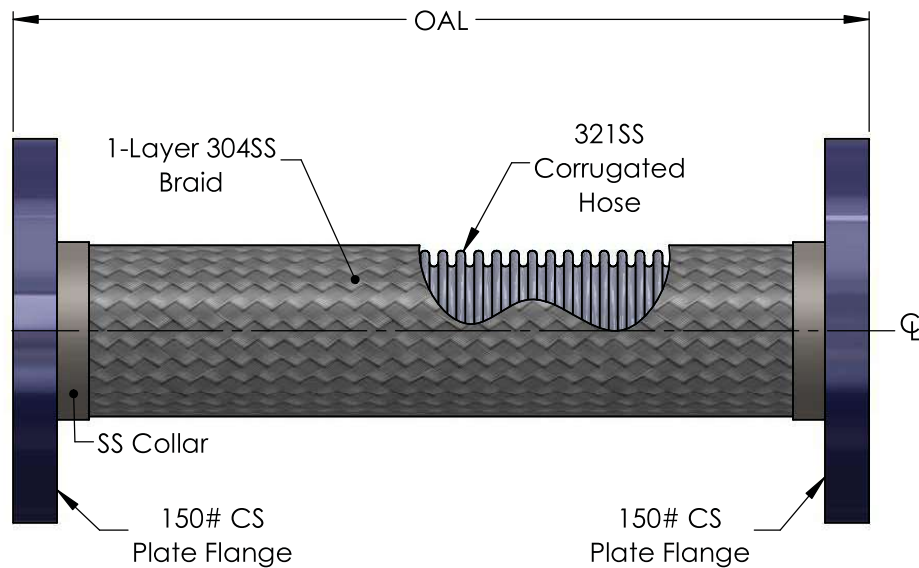

QTY	PART NUMBER	PIPE SIZE	OAL	PRESSURE RATING (PSI)*	WEIGHT (LBS)	NOTES	LATERAL OFFSET
	91-20-2	2"	9"	516	9		± 1/8"
	91-25-2	2-1/2"	9"	387	13		± 1/8"
	91-30-2	3"	9"	316	14		± 1/8"
	91-40-2	4"	9"	232	18		± 1/8"
	91-50-2	5"	11"	191	25		± 1/8"
	91-60-2	6"	11"	165	28		± 1/8"
	91-80-2	8"	12"	234	52		± 1/8"
	91-100-2	10"	13"	230	75		± 1/8"
	91-120-2	12"	14"	161	105		± 1/8"
	91-140-2	14"	14"	150	115		± 1/8"
	91-160-2	16"	14"	110	145		± 1/8"

*FOR SAFE WORKING PRESSURE ABOVE 70°F,
MULTIPLY PRESSURE SHOWN AT 70°F TIMES
CORRECTION FACTOR OF REQUIRED TEMP.

TEMP °F	FACTOR
70	1.0
150	.95
200	.91
250	.88
300	.85
350	.81
400	.78
450	.77
500	.77
600	.76

NSF 372 - LEAD FREE

The wetted surface of this product contacted by water contains less than one quarter of one percent (0.25%) of lead by weight. Material complies with state codes and standards where applicable, requiring reduced lead content.

REV.	
	
Customer:	
Project:	
SCALE: NONE	DRAWING NUMBER: